



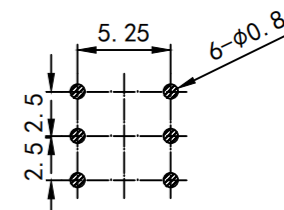





RoHS2.0
Compliant



电路简示图







PCB参考图

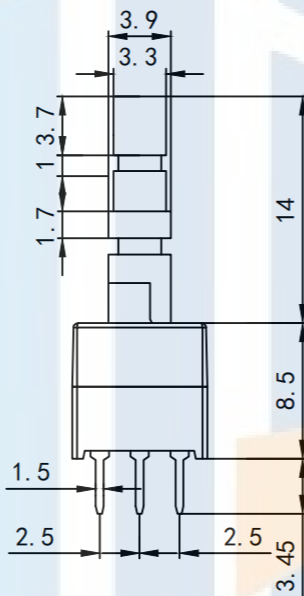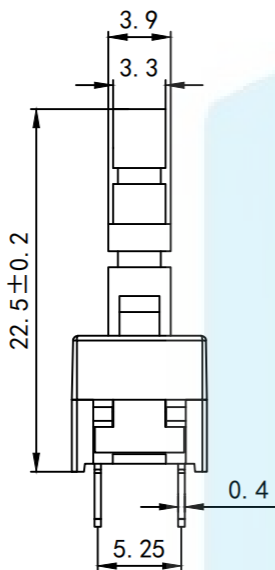

item

1. Rated electrical load: DC12V 0.1A
2. Insulation resistance: $\geq 100M\Omega$
3. Compressive strength: AC250V (50Hz) 1min
4. Ambient temperature: $-25^{\circ}C \sim +70^{\circ}C$
5. Relative temperature: ($40^{\circ}C$) $\leq 95\%$
6. Contact resistance: $\leq 50M\Omega$
7. Operation force: $190gf \pm 20gf$
8. Temperature resistance: 250°
9. Life: 10000 times

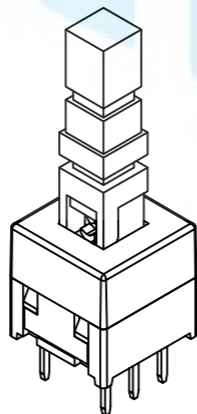

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°



东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448


TITLE:

按键开关
自(无)锁

PART NO: 8.45*8.45双排高柄6脚

DRAWING NO: 8.45*8.45*22.5

PROTECTON



DRAWN:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

18-10-08

18-10-08

18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4