
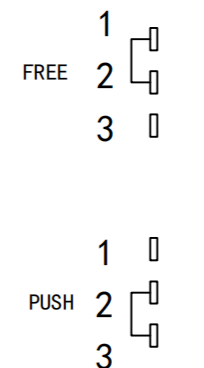
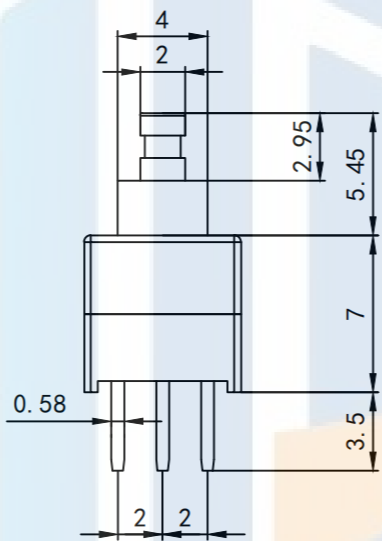


RoHS2.0
Compliant











SPECIFICATION:



1. Rated voltage :DC 50V 0.3A
2. Contact resistance :30MΩ MAX less than 30MΩ
3. Insulation resistance :100MΩ MIN 100 megohm or more
4. Compressive strength :AC500V(50/60Hz) 1 minute sensitivity current is 0.5mA
5. Operating temperature: -16°C±60°C
6. Mechanical life: 10,000 cycles

P. C. B LAYOUT



CIRCUIT DIAGRAM

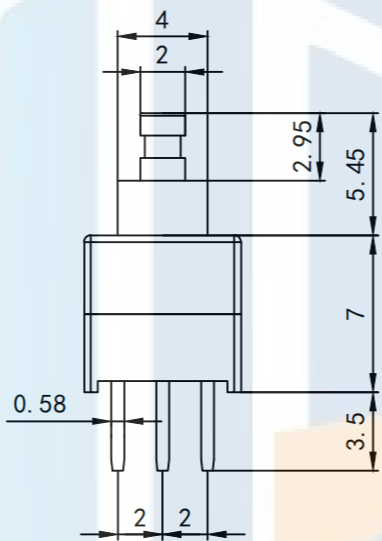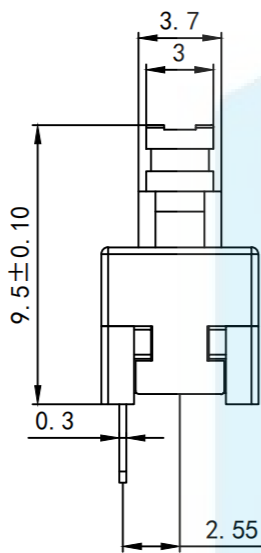

TOLERANCE		 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
X. XXX	±0.05			
X. XX	±0.15	https://www.hq-dz.com phone:15812872448		
X. X	±0.20	TITLE: PART NO:7*7单排高头边三脚		
X.	±0.30	按键开关		
ANGLE	±5.0°	自(无)锁 DRAWING NO:7*7*9.5		
PROTECTON		DRAWN:	DATE: 18-10-08	UNIT: mm
		CHECKED:	DATE: 18-10-08	SCALE: FULL
		APPROVED:	DATE: 18-10-08	SIZE: A4