
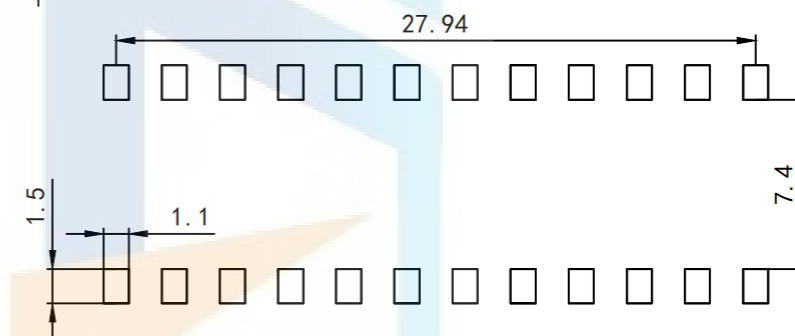

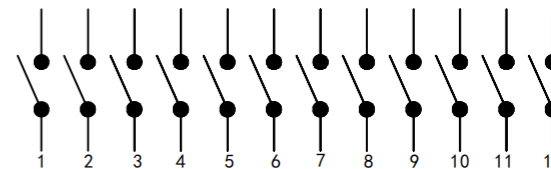
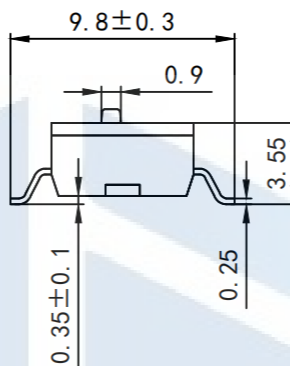


RoHS2.0
Compliant ✓

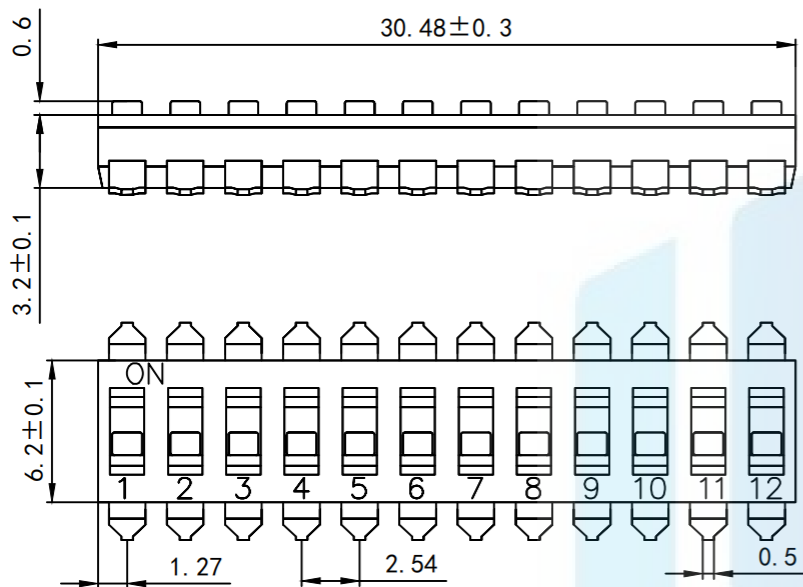

Specification:

Electrical life: 2000 times
rated current:

No Switching: 100mA@50VDC

Switching: 25mA@24VDC

Insulation Resistance: 100MΩ@250VDC

Contact Resistance: 50mΩmax

Dielectric strength: 500VAC/1min


Operating force: 500gfmax

Operating temperature: -30°C to 85°C (no ice)

TOLERANCE

| | |
|--------|-------|
| X. XXX | ±0.05 |
| X. XX | ±0.15 |
| X. X | ±0.20 |
| X. | ±0.30 |
| ANGLE | ±5.0° |

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨码开关

PART NO: BIS012

DRAWING NO: 30.48*3.2*2.54

DRAWN:

DATE: 18-10-08

UNIT:
mm

CHECKED:

DATE: 18-10-08

SCALE:
FULL

APPROVED:

DATE: 18-10-08

SIZE:
A4