

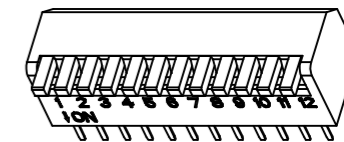
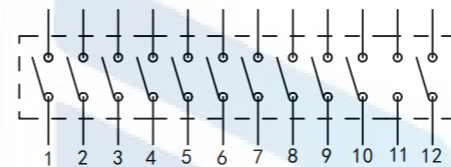



RoHS2.0
Compliant





3D图

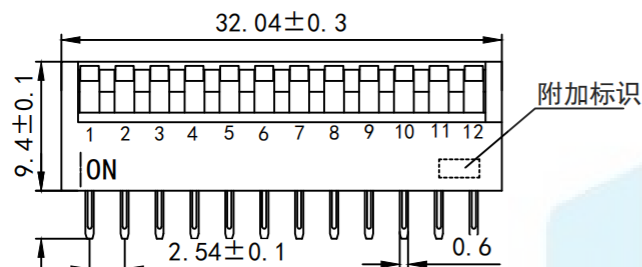

电路图

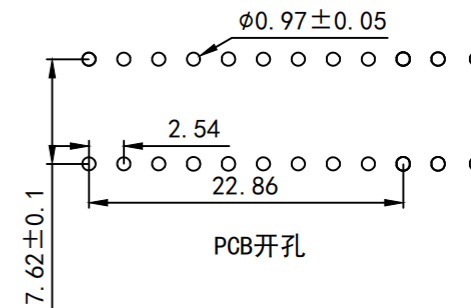

PCB开孔

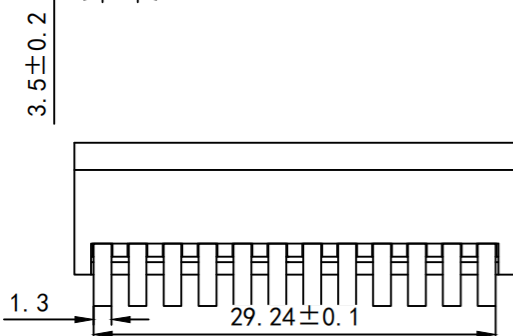

L长柄

R短柄

7, electrical life :2000 times <math><100\text{m}\Omega</math>@20 times /min, 25mA 24VDC

8, applicable temperature :-20°C to 85°C (no icing)

9. Welding requirements:

Manual welding :320°C no more than 2 seconds : (30 W soldering iron max.) Wave welding :260°C no more than 5 seconds, the switch is off during welding and cleaning

10, switch factory in the disconnected state.

Switching characteristics:

1. Switch capacity: 25mA@24VDC when switching

In non-switching mode: 100mA@50VDC

2, insulation resistance :$100\text{M}\Omega$ at 500VDC

3, contact resistance: initial value $50\text{m}\Omega$ max life end value $100\text{m}\Omega$ max

4, insulation strength :500VAC 50Hz /1min


5, electrode capacitance :<math><5\text{pF}</math>, 1MHz 10kHz

6. Operating force :1000gf max

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:
拨码开关

PART NO:DPL012

DRAWING NO:32.04*9.4*2.54

DRAWN:

DATE: 18-10-08

UNIT:
mm

CHECKED:

DATE: 18-10-08

SCALE:
FULL

APPROVED:

DATE: 18-10-08

SIZE:
A4