

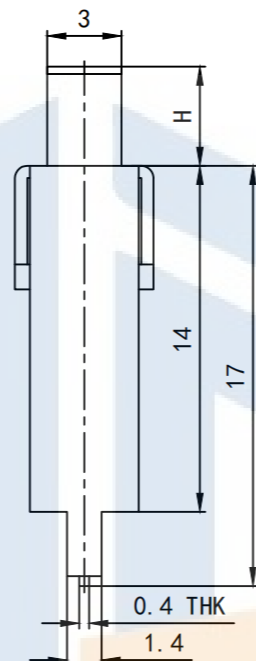
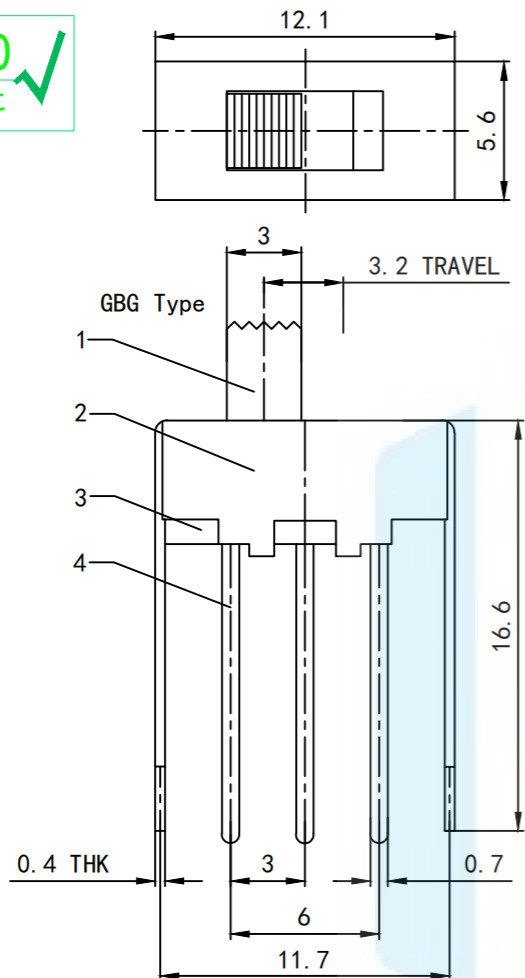


RoHS2.0  
Compliant ✓





P. C. B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

Rated voltage :DC 50V 0.3A  
 Contact resistance :30MΩ MAX less than 30MΩ  
 Insulation resistance :100MΩ MIN 100 megohm or more  
 Compressive strength :AC500V (50/60Hz) 1 minute sensitivity current is 0.5mA  
 Operating temperature: -16°C±60°C  
 Mechanical life: 10,000 cycles

<b>TOLERANCE</b> X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°	 <b>东莞市恒祺电子科技有限公司</b> Dongguan Hengqi Electronic Technology Co., Ltd	<a href="https://www.hq-dz.com">https://www.hq-dz.com</a>		phone:15812872448	
		<b>TITLE:</b> 拨动开关		<b>PART NO:</b> SS-12F42	
<b>PROTECTON</b> 	<b>DRAWN:</b>		<b>DATE:</b>	18-10-08	<b>UNIT:</b> mm
	<b>CHECKED:</b>		<b>DATE:</b>	18-10-08	<b>SCALE:</b> FULL
	<b>APPROVED:</b>		<b>DATE:</b>	18-10-08	<b>SIZE:</b> A4