


RoHS2.0
Compliant

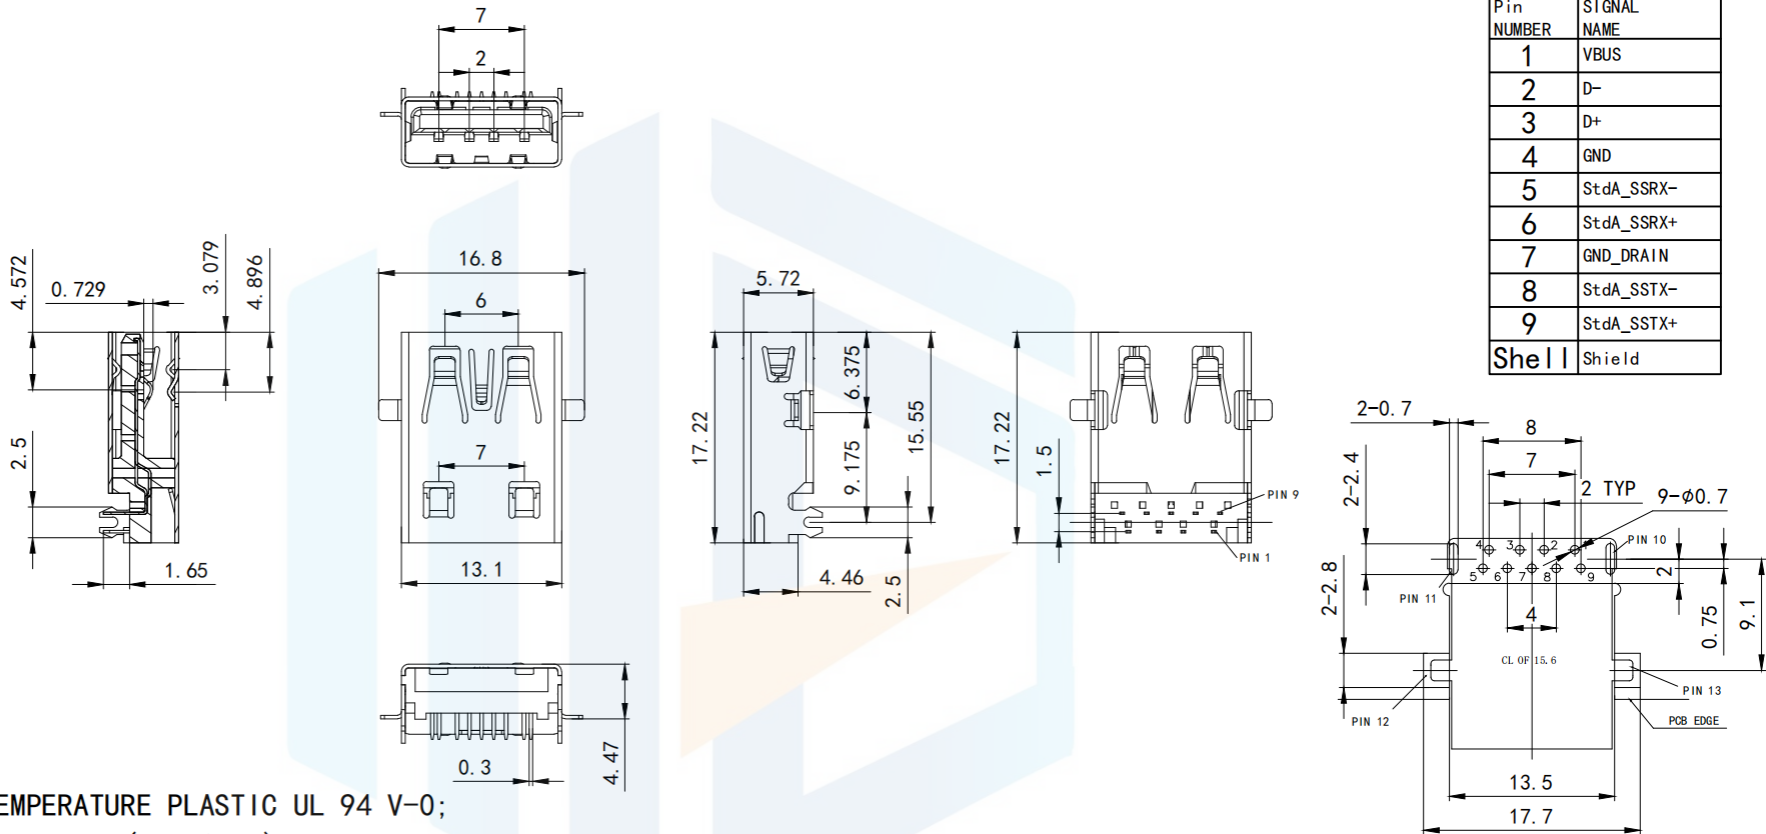

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

NOTE :

1. MATERIAL :

1.1 INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0;

1.2 CONTACT:COPPER ALLOY(T=0.20mm)

1.3 SHELL:SUS201(T=0.30mm)

2. ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE:30mΩ Max

2.2 CONTACT CURRENT RATING:1.5A

2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R. M. S.

2.4 INSULATION RESISTANCE 100 MEGOHMS Min
2.5 OPERATING TEMPERATURE:-40° C85° C

MECHANICAL CHARACTERISTICS :

3.1 MATING FORCE:35 N Max

3.2 UNMATED FORCE:10 N Min INITIAL;8N Min AFTER TEST

3.3 DURABILITY:5,000 CYCLES

4.1 TERMINAL CONTACT:(SEE TAB)GOLD PLATING ALL

OVER 50u" MINNICKEL AND 80u"MIN Tin ALL


OVER 50u" MIN NICKEL ON SOLDER AREA

4.2 SHELL:80u"MIN. NICKEL ALL OVER

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

USB3.0 AF 沉板DIP反向直边 4脚定位
前贴后插H=4.46

PART NO:USB3.0-Y084

DRAWING NO:17.22*13.1*5.72

DRAWN:

CHECKED:

APPROVED:

DATE: 18-10-08

DATE: 18-10-08

DATE: 18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4