

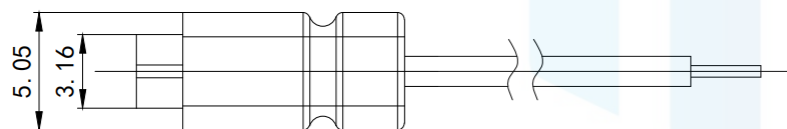


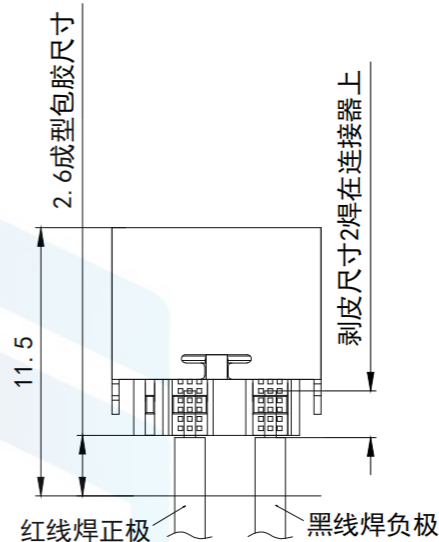


RoHS2.0
Compliant

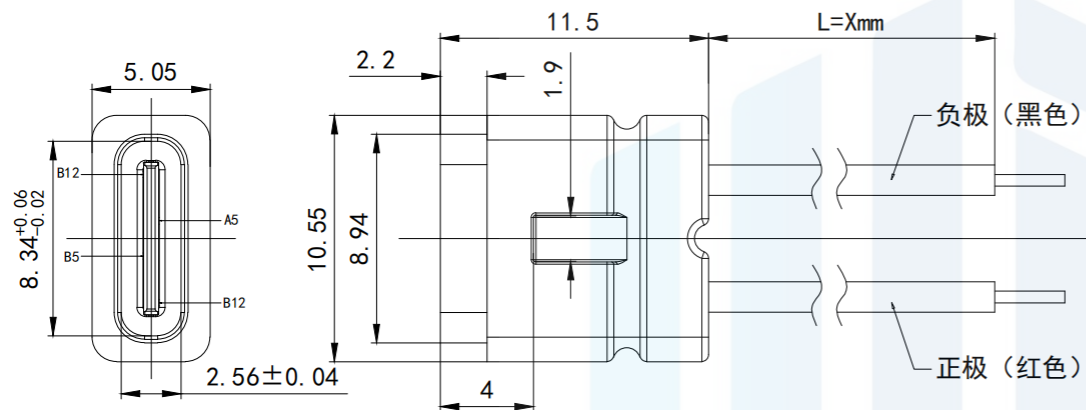

Note:

1. No shrinkage, flow line, bubble, bulge;
2. Wire without indentation;
3. Plug and hardware can not be scratched;
4. 100% open circuit, short circuit and dislocation test;
5. Conduction :3ΩMax;
6. Insulation impedance :10MΩ Min;
7. Withstand voltage test :DC 300V 1S.

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		https://www.hq-dz.com phone:15812872448	
PROTECTON	X. X	±0.20	TITLE: TYPE C 2P防水母座注塑焊线式 带线L=X不带电阻	PART NO:TYPE-C2P-BS0115FS	
	X.	±0.30		DRAWING NO:10.55*11.5*L	
	ANGLE	±5.0°	DRAWN:	DATE:	18-10-08
			CHECKED:	DATE:	18-10-08
			APPROVED:	DATE:	18-10-08
				UNIT:	mm
				SCALE:	FULL
				SIZE:	A4