
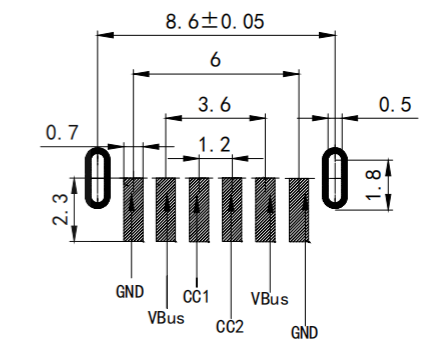
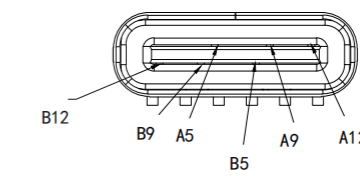
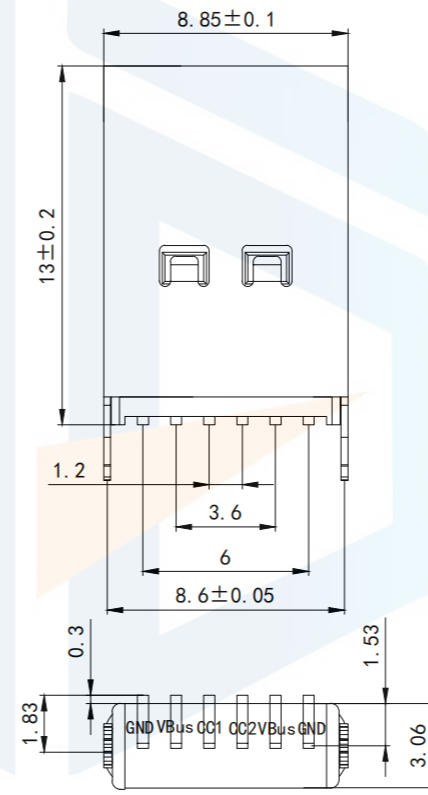


RoHS2.0
Compliant

B12	GND
B9	VBus
B5	CC2
A5	CC1
A9	VBus
A12	GND
PIN	SIGNAL NAME

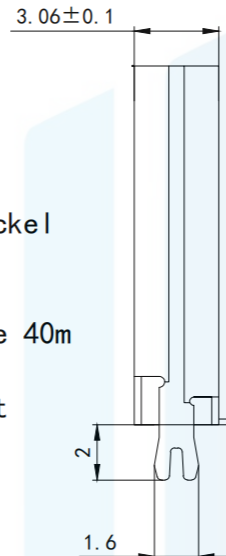

RECOMMENDED P. C. B. LAYOUT
TOLERANCE UNSPECIFIED +0.05mm





NOTE:

- Material:
 - Adhesive core: LCP UL94 V-0
 - terminal: C2680, T 0.2mm; Bottom, gold plated
 - shell: SUS201/304 Nickel plated surface
- Electrical characteristics:
 - Contact area: contact resistance 40mΩ Max, 10 mΩ variation allowed. Test conditions: 20 mV, 100 mA measurement
 - Contact current: 3A VBUS pin; 1.25AHTCND pin: 0.25A for other pins
 - Rated electricity: 5V
 - Electrically resistant to electricity: 100VAC
 - Insulation resistance: 100 megaohms less
- Mechanical properties:
 - Insertion force: 0.5-2.0Kg
 - Pull-out force: 0.6-2.0Kg
 - Number of plugging and unplugging: 10000 times.
- Working environment: -20° C to +85° C
- Soldering heat resistance: the terminal is immersed in a tin bath at 250+5° C; It lasts 3-5S+0.5Scc, and the tin-staining area is more than 95%.
- Appearance: The parts can withstand the following welding conditions: temperature 250° C, time 8-10 seconds, no damage and deformation in appearance

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
		https://www.hq-dz.com phone:15812872448		
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: TYPE C 6P立式贴片 2定位鱼叉脚插板		
		PART NO: TYPE-C6P-LT1013		
		DRAWING NO: 8.65*13*3.06		
		DATE:	18-10-08	UNIT: mm
		DATE:	18-10-08	SCALE: FULL
		DATE:	18-10-08	SIZE: A4

RoHS2.0
Compliant

B12	GND
B9	VBus
B5	CC2
A5	CC1
A9	VBus
A12	GND
PIN	SIGNAL NAME

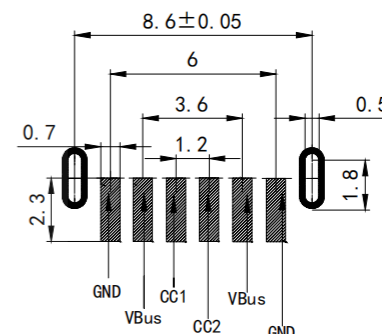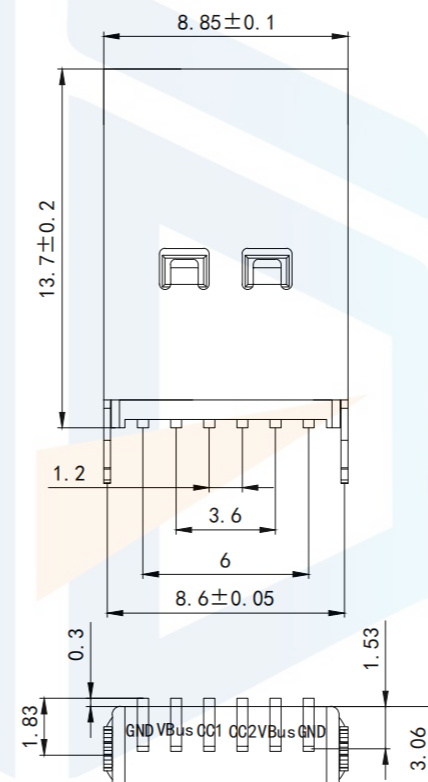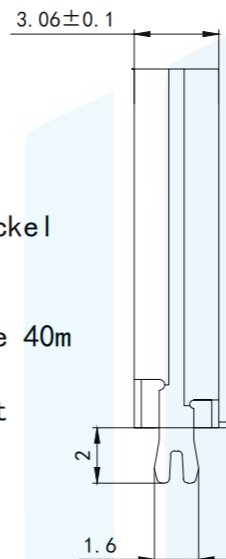

RECOMMENDED P. C. B. LAYOUT
TOLERANCE UNSPECIFIED +0.05mm





NOTE:

- Material:
 - Adhesive core: LCP UL94 V-0
 - terminal: C2680, T 0.2mm; Bottom, gold plated
 - shell: SUS201/304 Nickel plated surface
- Electrical characteristics:
 - Contact area: contact resistance 40mΩ Max, 10 mΩ variation allowed. Test conditions: 20 mV, 100 mA measurement
 - Contact current: 3A VBUS pin; 1.25AHTCND pin: 0.25A for other pins
 - Rated electricity: 5V
 - Electrically resistant to electricity: 100VAC
 - Insulation resistance: 100 megaohms less
- Mechanical properties:
 - Insertion force: 0.5-2.0Kg
 - Pull-out force: 0.6-2.0Kg
 - Number of plugging and unplugging: 10000 times.
- Working environment: -20° C to +85° C
- Soldering heat resistance: the terminal is immersed in a tin bath at 250+5° C; It lasts 3-5S+0.5Scc, and the tin-staining area is more than 95%.
- Appearance: The parts can withstand the following welding conditions: temperature 250° C, time 8-10 seconds, no damage and deformation in appearance

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
		https://www.hq-dz.com phone:15812872448	
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: TYPE C 6P立式贴片 2定位鱼叉脚插板	
		PART NO: TYPE-C6P-LT1013A	
		DRAWING NO: 8.65*13*3.06	
	DATE: 18-10-08	UNIT: mm	
	DATE: 18-10-08	SCALE: FULL	
	DATE: 18-10-08	SIZE: A4	

RoHS2.0
Compliant

B12	GND
B9	VBus
B5	CC2
A5	CC1
A9	VBus
A12	GND
PIN	SIGNAL NAME

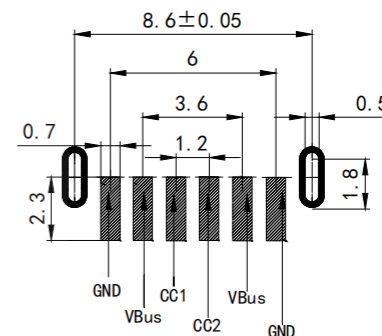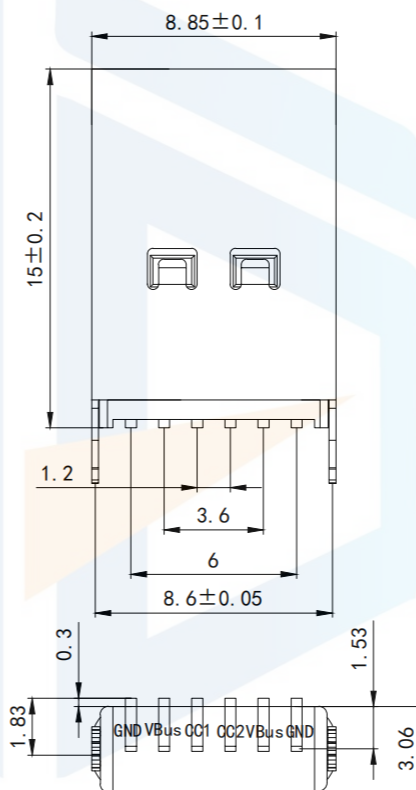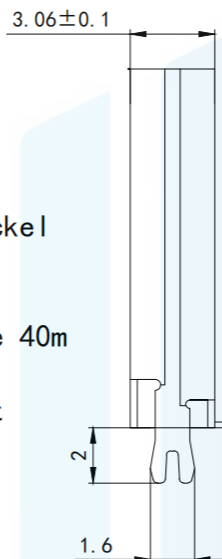

RECOMMENDED P. C. B. LAYOUT
TOLERANCE UNSPECIFIED +0.05mm

NOTE:

- Material:
 - Adhesive core: LCP UL94 V-0
 - terminal: C2680, T 0.2mm; Bottom, gold plated
 - shell: SUS201/304 Nickel plated surface
- Electrical characteristics:
 - Contact area: contact resistance 40mΩ Max, 10 mΩ variation allowed. Test conditions: 20 mV, 100 mA measurement
 - Contact current: 3A VBUS pin; 1.25AHTCND pin: 0.25A for other pins
 - Rated electricity: 5V
 - Electrically resistant to electricity: 100VAC
 - Insulation resistance: 100 megaohms less
- Mechanical properties:
 - Insertion force: 0.5-2.0Kg
 - Pull-out force: 0.6-2.0Kg
 - Number of plugging and unplugging: 10000 times.
- Working environment: -20° C to +85° C
- Soldering heat resistance: the terminal is immersed in a tin bath at 250+5° C; It lasts 3-5S+0.5Scc, and the tin-staining area is more than 95%.
- Appearance: The parts can withstand the following welding conditions: temperature 250° C, time 8-10 seconds, no damage and deformation in appearance

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd		
		https://www.hq-dz.com phone:15812872448		
PROTECTON 	DRAWN: CHECKED: APPROVED:	TITLE: TYPE C 6P立式贴片 2定位鱼叉脚插板		
		PART NO: TYPE-C6P-LT1013B		
		DRAWING NO: 8.65*13*3.06		
		DATE:	18-10-08	UNIT: mm
		DATE:	18-10-08	SCALE: FULL
		DATE:	18-10-08	SIZE: A4