



RoHS2.0
Compliant

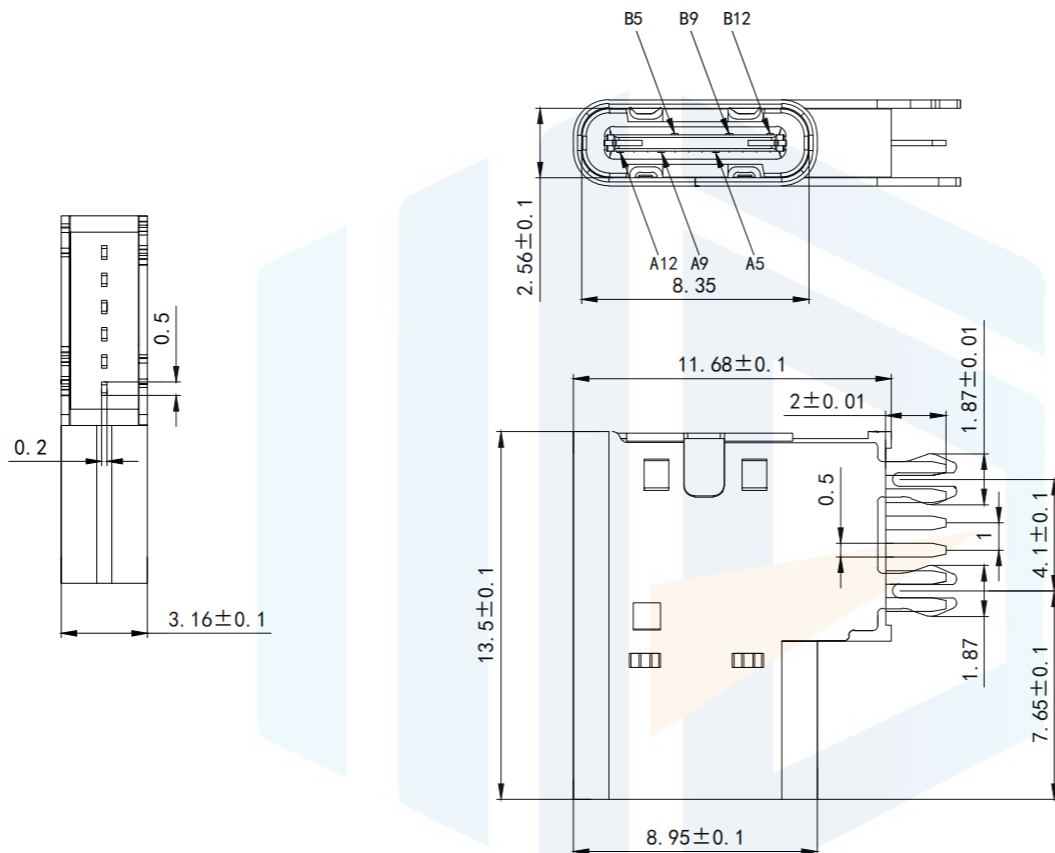

Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND
A4	VBus	B9	VBus
A5	CC1	B7	DN2
A6	DP1	B6	DP1
A7	CC2	B5	CC2
A9	VBus	B4	VBus
A12	GND	B1	GND

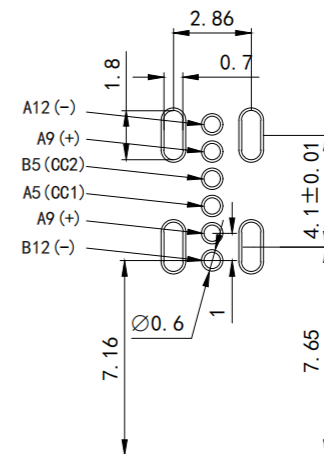

NOTES:


SPECIFICATION

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30C~85C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: S10,000 CYCLES

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

TYPE C 6P侧插基座加高

PART NO: TYPE-C6P-CC1135A

DRAWING NO: 13.5*11.68*3.16

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4