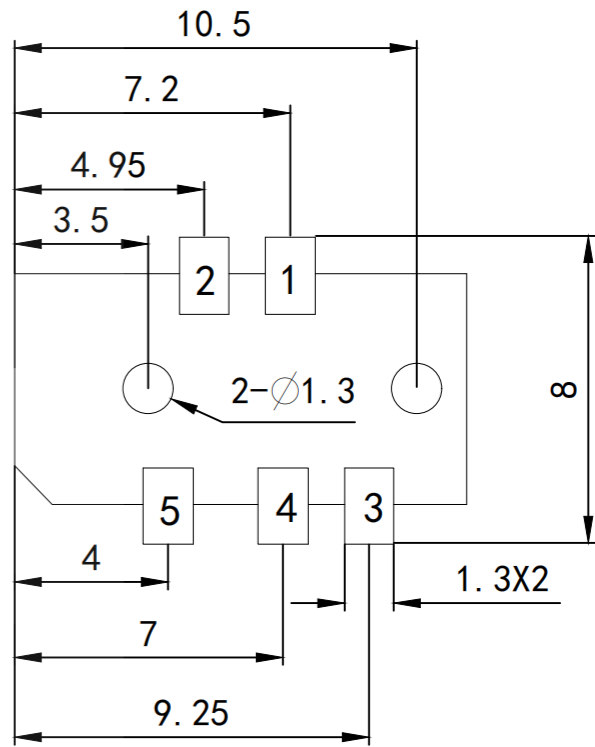
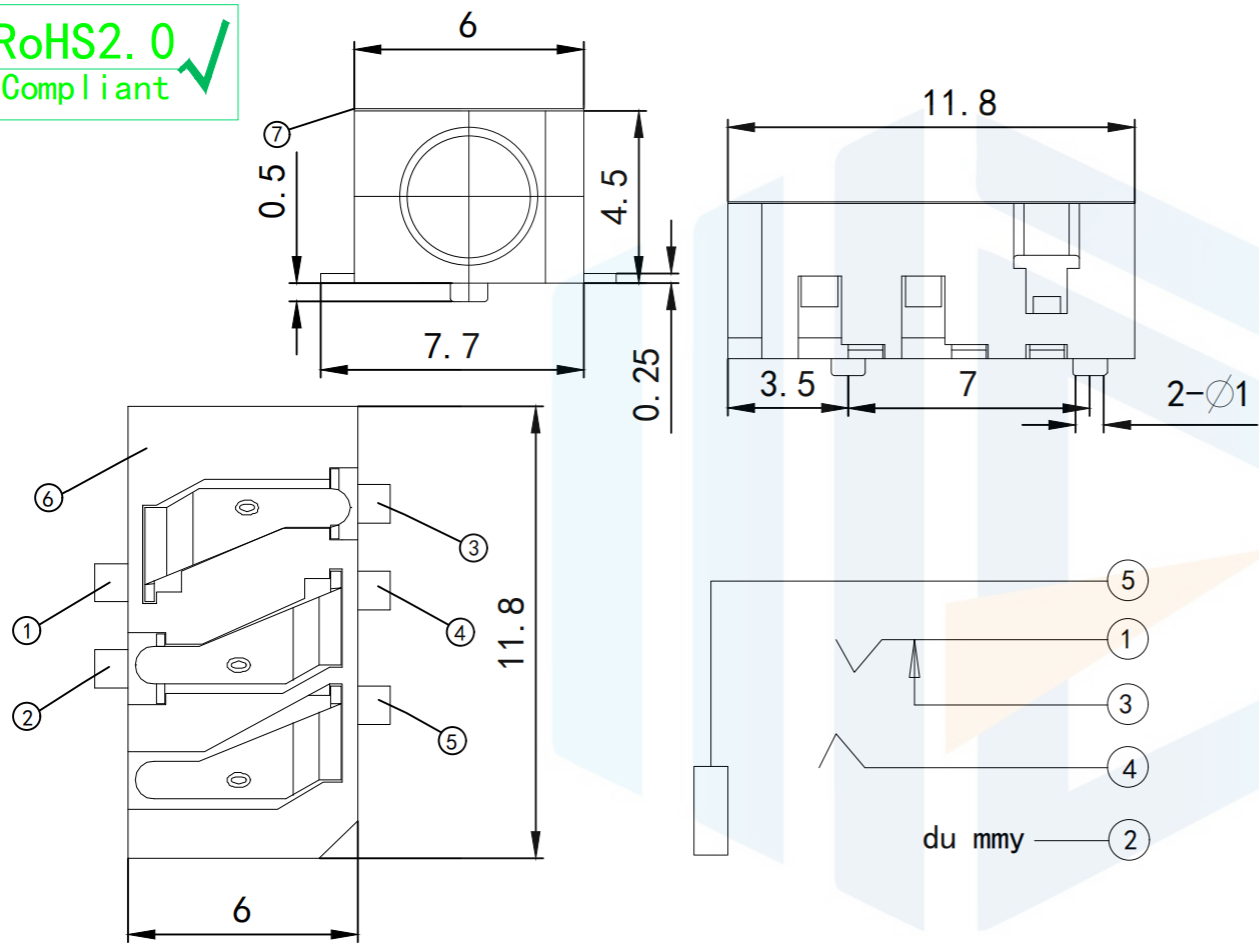




RoHS2.0
Compliant

P. C. B. LAYOUT TOP VIEW



- Main technical performance**
1. Rated electrical load: 30V 0.5A;
 2. Contact resistance: 0.03Ω;
 3. Absolute edge resistance: >100 MΩ;
 4. Withstand voltage: AC 250V (50Hz) min
 5. Insertion and withdrawal force: 3-15N
 6. Life: 5,000 times.

TOLERANCE X. XXX ±0.05 X. XX ±0.15 X. X ±0.20 X. ±0.30 ANGLE ±5.0°	 东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd https://www.hq-dz.com phone:15812872448	TITLE: 耳机插座		PART NO: PJ-331	
		PROTECTON 		DRAWING NO: 11.8*6*4.5	
DRAWN:	DATE: 18-10-08	UNIT: mm	CHECKED:	DATE: 18-10-08	SCALE: FULL
APPROVED:	DATE: 18-10-08	SIZE: A4			